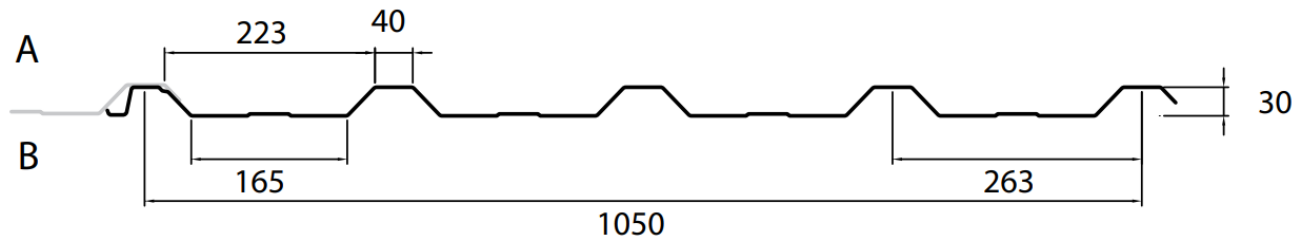


TECHNICAL DATA SHEET**SAB 30KD/1050-S**

Gauge	Weight
0,63 mm	5,89 kg/m ²
0,75 mm	7,01 kg/m ²
0,88 mm	8,22 kg/m ²
1,00 mm	9,35 kg/m ²

STEEL GRADE

Minimal S-320 GD+Z / ZM / ZA / AZ

SUSTAINABILITYEnvironmentally relevant product information (EPD) are published on www.sabprofil.com.**QUALITY CONTROLE**

We guarantee that the product has been produced according the valid standards and directives

REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

NORMEN

Production according ISO 9001, ISO 14001 en BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according EPAQ Quality Regulations for Profiles

Steel grade according EN 10346

IJsselstein, April 2024