


## TECHNICAL DATA SHEET

### SAB 200R/750

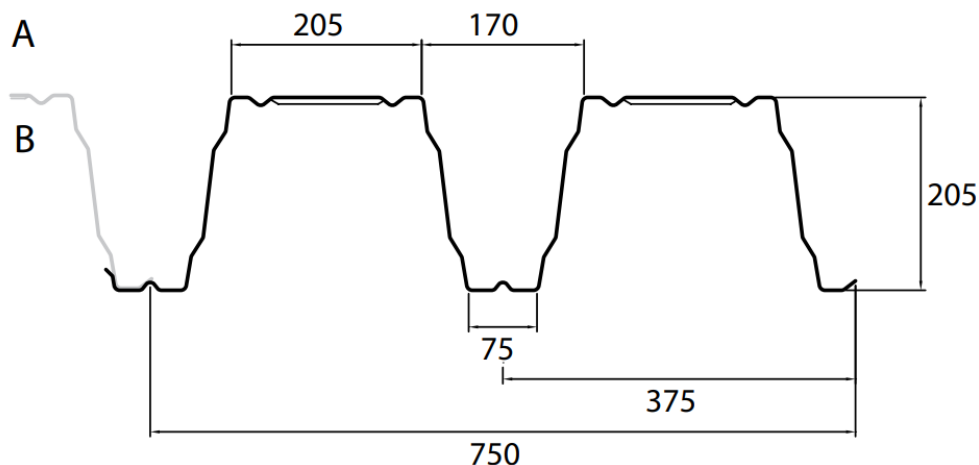

Gauge	Weight
0,75 mm	11,78 kg/m <sup>2</sup>
0,88 mm	13,82 kg/m <sup>2</sup>
1,00 mm	15,70 kg/m <sup>2</sup>
1,13 mm	17,74 kg/m <sup>2</sup>
1,25 mm	19,63 kg/m <sup>2</sup>
1,50 mm	23,55 kg/m <sup>2</sup>

#### STEEL GRADE

Minimal S-320 GD+Z / ZM / ZA / AZ

#### SUSTAINABILITY

Environmentally relevant product information (EPD) are published on [www.sabprofil.com](http://www.sabprofil.com)

#### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

#### SPANS

Depend on wind loads, deflection limitations and safety factors.  
See our SAB-brochure for more information

#### STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001  
CE-marking and Declaration of Performance according EN 1090  
Tolerances according PPA-Europe Quality Regulations  
Steel grade according EN 10346

IJsselstein, April 2024