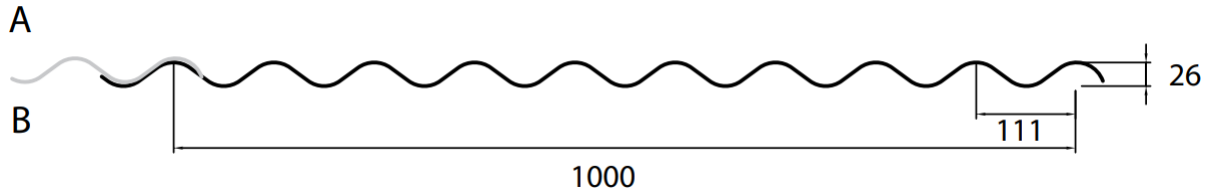


**TECHNICAL DATA SHEET****SAB 27/1000**

Gauge	Weight
0,63 mm	6,18 kg/m <sup>2</sup>
0,75 mm	7,36 kg/m <sup>2</sup>
0,88 mm	8,64 kg/m <sup>2</sup>
1,00 mm	9,81 kg/m <sup>2</sup>

**STEEL GRADE**

Minimal S-320 GD+Z / ZM / ZA / AZ

**SUSTAINABILITY**Environmentally relevant product information (EPD) are published on [www.sabprofil.com](http://www.sabprofil.com).**QUALITY CONTROLE**

We guarantee that the product has been produced according the valid standards and directives

**REACTION TO FIRE**

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

**SPANS**

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

**NORMEN**

Production according ISO 9001, ISO 14001 en BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according EPAQ Quality Regulations for Profiles

Steel grade according EN 10346

IJsselstein, April 2024